

Evaluation of Optical Magnitude of Deep Space Spacecraft

Liu Wei^{1,2}, *Tang Zheng-Hong*¹, *Li Yong-Da*²

¹Shanghai Astronomical Observatory, Chinese Academy of Sciences

²Changchun University of Science and Technology, China
liuwei@shao.ac.cn

Optical-electric technology can measure the tangential position and velocity of spacecraft. To know the feasibility of the use of optical-electric technology, it is necessary to estimate the magnitude of spacecraft first. Since the spacecrafts are non-self-illumination objects, the estimation formulas of the optical magnitude of spacecraft is constructed according to the radiation theory and the extra-atmospheric radiant emittance of the Sun in the visible light wave band. Taking Chang'e-1 as an example, the magnitude of it in different situations is calculated.

Introduction

Because the spacecraft always needs to fly for long distances, it is very important to monitor it precisely. The spacecraft has 6 degrees of freedom in the space, three dimension of position and three dimension of velocity. The mission to measure the parameters of the orbit of the spacecraft is performed by different tracing techniques, like radio and optical technologies. There are three main radio technologies in deep space network, radio technology which includes radio interferometry, Doppler system with double frequency, microwave radio radar. The radio interferometry is to measure the angle and compare the phase of spacecraft. Doppler system with double frequency is to measure the velocity of spacecraft. Microwave radio radar is to measure the distance and the imaging of spacecraft. However optical-electric technology can measure the tangential position and velocity of spacecraft, which can provide additional information to trace the spacecraft more precisely. But the optical-electric technology has some obvious limitation, it can not work at daytime and under bad weather.

Chang'e-1 is planned to be the first of a series of Chinese missions to the Moon. The spacecraft will launch in late 2007 on a CZ-3A booster and orbit the Moon for a year to test the technology for future missions and to study the lunar environment and surface regolith. Although Chang'e-1 will be mainly monitored by radio technology as planned, it is still valuable to analysis the feasibility to use optical-electric technique as the assistant of other techniques. To know the feasibility, it is necessary to evaluate the optical magnitude of the spacecraft in different situations firstly. This paper will present the initial results of the estimation of the optical magnitude of Chang'e-1 according to the radiation theory and the extra-atmospheric radiant emittance of the Sun in the visible light wave band.

The ground irradiance of diffuse refection of satellite surface

Based on the formulas of Plank blackbody radiation [1], the monochrome radiant emittance of blackbody radiation is

$$M(\lambda, T_0) = 10^{12}(c_1/\lambda^5)[\exp(c_2/\lambda T_0) - 1]^{-1} \quad (1)$$

where λ is wavelength (μm), T_0 is blackbody temperature(K), $c_1=3.742 \times 10^{-4} \text{W} \cdot \mu\text{m}^2$ is first radiation constant, $c_2=14388 \mu\text{m} \cdot \text{K}$ is second radiation constant. The unit of the monochrome radiant emittance $M(\lambda, T_0)$ is $\text{W}/(\text{m}^2 \cdot \mu\text{m})$. Usually solar radiation can be regarded as blackbody radiation with the temperature of 5900K, whose monochrome radiant emittance can be established by (1).

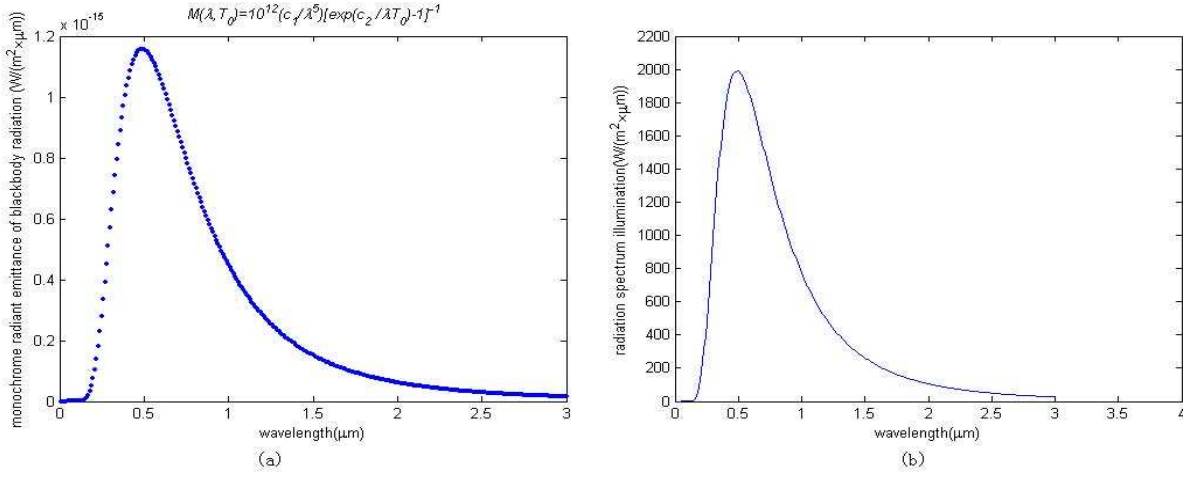


Figure 1: The curves change with wavelength

The solar radiant emittance M and its total radiant flux ϕ between λ_1 and λ_2 are

$$M = c_1 \int_{\lambda_1}^{\lambda_2} \lambda^{-5} [\exp(c_2/\lambda T_0) - 1]^{-1} d\lambda \quad (2)$$

$$\phi = 4\pi R_s^2 M \quad (3)$$

where $T_0 = 5900\text{K}$, the solar radius is $R_s = 6.9599^8 m$ and the unit of radiant emittance is $\text{W}/\mu\text{m}^2$.

Suppose that the total radiant flux from the Sun is homogeneous in orientation space, thus the solar luminous intensity from λ_1 to λ_2 is

$$I = \phi/4\pi = R_s^2 M \quad (4)$$

According to inverse-square law of the distance, the extra-atmospheric illumination E_s in the range of wavelength between λ_1 and λ_2 is

$$E_s = I/D^2 = 10^{12} R_s^2 c_1 D^{-2} \int_{\lambda_1}^{\lambda_2} \lambda^{-5} [\exp(c_2/\lambda T_0) - 1]^{-1} d\lambda \quad (5)$$

where D is the actual distance between the Sun and the Earth. The unit of illumination E_s is W/m^2 . The radiation flux of the surface element dS of the satellite received from the Sun is

$$d\phi = E_s \cos \alpha dS \quad (6)$$

where α is the angle between the link of the Sun, the spacecraft and the normal of the surface element dS of the spacecraft.

The radiation flux from the surface element dS of the spacecraft is

$$d\phi' = \sigma d\phi \quad (7)$$

where σ , the diffuse reflectance of the spacecraft, is independent on the wavelength in the range of visible light ($0.38\mu\text{m}$ - $0.76\mu\text{m}$). Suppose that β is the angle (rad) between the link of the observer and the spacecraft and the normal of the surface element dS , the illumination intensity at the orientation of which is

$$dI = \cos \beta d\phi' / \Omega = \sigma E_s \cos \alpha \cos \beta dS / \pi \quad (8)$$

So, the ground irradiance of spacecraft diffuse reflection from λ_1 to λ_2 is

$$E_m = \int_s L^{-2} dI = (\pi L^2)^{-1} \sigma E_s \int_s \cos \alpha \cos \beta dS \quad (9)$$

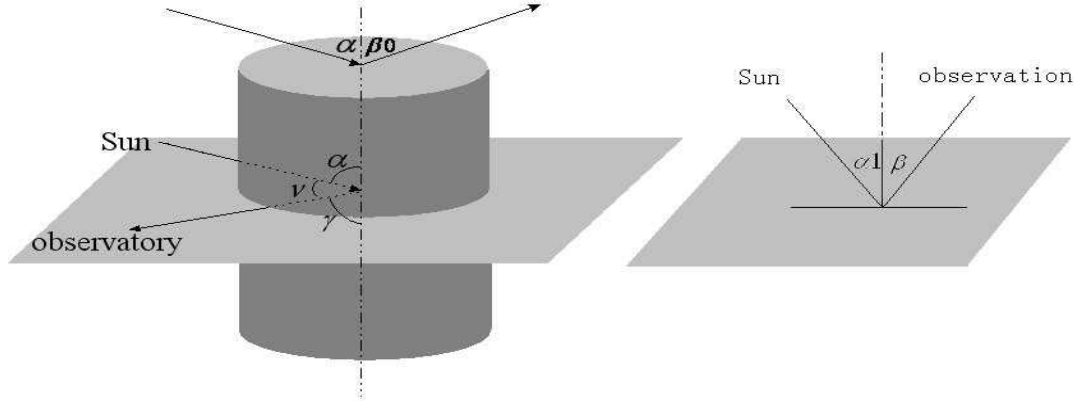


Figure 2: The cylinder and plane object

where E_s is specified by (5) and L is the distance between observer and space object and τ , the vertical atmospheric transmissivity, is independent on the wavelength in the range of visible light; m , atmospheric mass number, denotes the ratio of optical thickness between inclined orientation and vertical orientation.

$$m = [\cos z + 0.150(93.885 - z)^{-1.253}]^{-1} \quad (10)$$

where z is the zenith angle of spacecraft (rad). When $z = 86^\circ$, the error of atmospheric mass number is smaller than 0.1%.

Most of the spacecrafts are cylindrical, so a cylinder model is reasonable to be used here. The following formula gives the irradiance of the cylinder object.

$$E_z = (4\pi L^2)^{-1} D_z h \sigma \tau^m E_s \sin \alpha \sin \gamma [\sin \nu + (\pi - \nu) \cos \nu] \quad (11)$$

where D_z is the diameter of the base surface and h is the height of cylinder. The position relationship among the angles we can see from Fig (2). α is the angle of the Sun, cylinder object and the axial line of cylinder object, γ is the angle between observer, cylinder object and the axial line of cylinder object, ν is the angle between the Sun, cylinder object and observer.

One of the base surface can also be seen.

$$E_b = (4\pi L^2)^{-1} \sigma \tau^m E_s \pi D^2 \cos \alpha \cos \beta_0 \quad (12)$$

where β_0 is an angle of the base surface towards to the observation.

We must consider the solar battery planes of the spacecraft, so we use the plane to stand for the solar battery planes.

$$E_p = (\pi L^2)^{-1} \sigma \tau^m E_s S \cos \alpha_1 \cos \beta \quad (13)$$

where α_1 is incident angle and β is reflecting angle.

Customarily we use equivalent apparent magnitude instead of ground illumination to figure the luminance of celestial body in astronomy [3]. The scale is logarithmic, and a difference of 5 magnitudes means a brightness difference of exactly 100 times. Based on the definition of the equivalent apparent magnitude, we take the Sun as reference star and its equivalent apparent magnitude is -26.74. The ground illumination value of the Sun is E_0 coming within visible light. The equivalent apparent magnitude of the spacecraft with the illumination $E_m = E_z + E_b + 2E_p$ is written as

$$m = -26.74 - 2.5 \lg(E_m/E_0). \quad (14)$$

Simulation

We take Chang'e-1 as an example. Its magnitude in different cases is calculated here. The dimension of Chang'e-1 is 2000mm×1720mm×2200mm. We consider it as a cylinder and suppose that its base surface

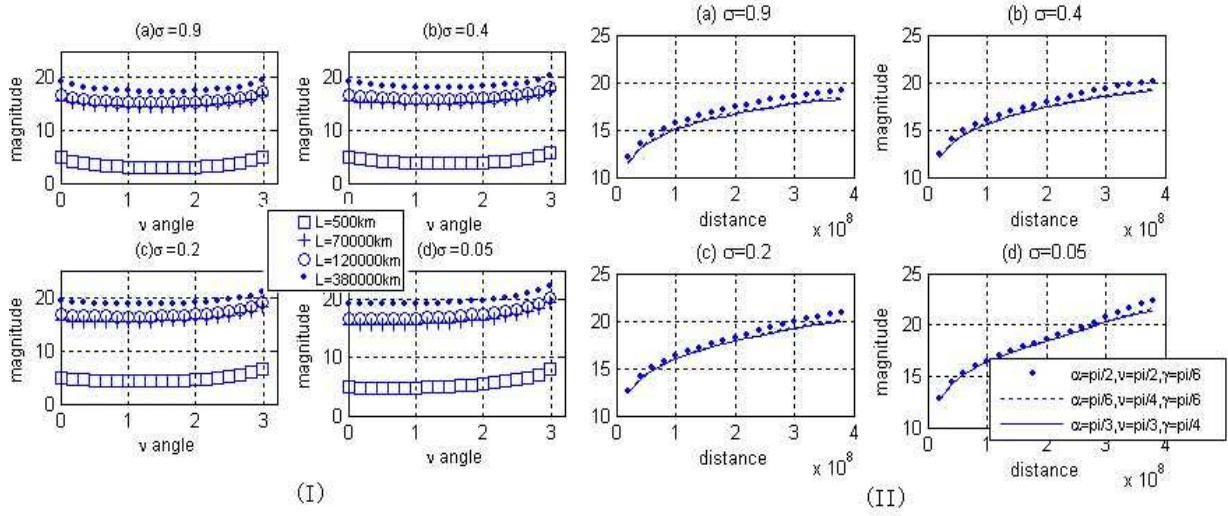


Figure 3: The magnitude change curve

diameter is $D_z = 2000\text{mm}$ and its height is 2200mm . The average vertical atmospheric transmissivity is 0.4 [2]. The distance of the spacecraft from launching to coming into the orbit of the Moon is from 0 to 380000km . We use four kinds of color to simulate the surface of the object, whose surface diffuse reflectance are 0.9 , 0.4 , 0.2 and 0.05 , respectively. We all use $\pi/4$ as the reflecting angle β . The angle relationship of the spacecraft would be told at length in pictures. We suppose that one of the area of the solar battery planes is 22.6 m^2 . The diffuse reflectance of them is 0.01 . The angles of α_1 and β are from 0 to $\pi/2$.

In Fig 3(I) y-axis represents magnitude and x-axis represents the angle of ν with a variety of $0 \rightarrow \pi$. In the four pictures we employ four different kinds of diffuse reflectance shown in Fig 3(I). We use some random angles. Dots represents the data of $\alpha = \pi/4$, $\gamma = \pi/6$. Circles represents the data of $\alpha = \pi/6$, $\gamma = \pi/3$. Crosses represents the data of $\alpha = \pi/3$, $\gamma = \pi/3$. Squares represents the data of $\alpha = \pi/3$, $\gamma = \pi/6$. The four kinds of symbols also represent different distance. They are 500km , 70000km , 120000km , 380000km , respectively. It is seen that if the distance increases, the magnitude increases too. But it changes not significantly with the angle. In Fig 3(II) y-axis is the same as 3(I) and x-axis represents the distance from the spacecraft to the Earth and varies from 500km to 380000km . Three symbols stand for different relationship of the angles. We can see them at length in the picture. These comparisons suggest that the variation of the magnitude increases with the distance increasing and decreases with the diffuse reflectance increasing.

We suppose that $\alpha = \pi/3$, $\gamma = \pi/3$, $\nu = 0 \rightarrow \pi$ and L varies from 500km to 380000km in Fig 4. The three-dimensional image obtained from these data, where x-axis represent angle of ν , y-axis represents distance and z-axis represents magnitude. Thus the variation of magnitude of Chang'e-1 is about 10 magnitude.

Conclusions

A model of evaluation the magnitude of cylinder object is build. From the simulation data, it is found that the magnitude is dependent on distance, surface diffuse reflectance and angle. The magnitude varies significantly with distance and surface diffuse reflectance, but it does not vary with the angle so clearly. The further the distance is, the larger the magnitude is. It is different with the relationship between the surface diffuse reflectance and the magnitude. At last we use the data of Chang'e-1 to calculate, from launching to coming into the orbit of the Moon, whose variation of magnitude is about 10 mag.

Acknowledgements

The author Liu Wei wish to thank her friends Li Yan, Gao Gang-Jie, Yan Yu-Rong, Tian Yan-Tao, Xiong Wei and Mao Yin-Dun for their kind help in this work.

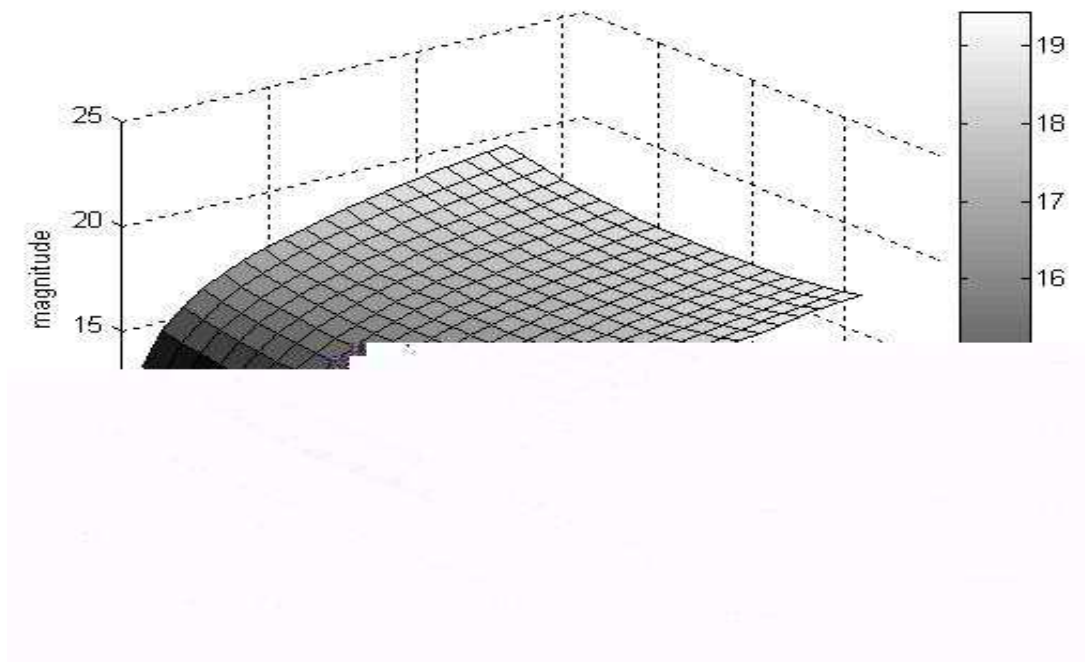


Figure 4: The three-dimensional image

References

- [1] Li Shu-Jun, Gao Xiao-Dong, Zhu Qi-Xiang. Opto-Electronic Engineering, V. 31, 4, pp. 1-8 (2004)
- [2] Zhao Yi, Li Jiye. Recent Developments in World Seismology, Serial No.331, pp.32-40 (2006)
- [3] Shen Feng, Jiang Wenhan. Chinese Space Science and Technology, pp. 13-17 (1996)